


22 GA
3 CONDUCTOR
CABLE

22 GA
2 CONDUCTOR
CABLE

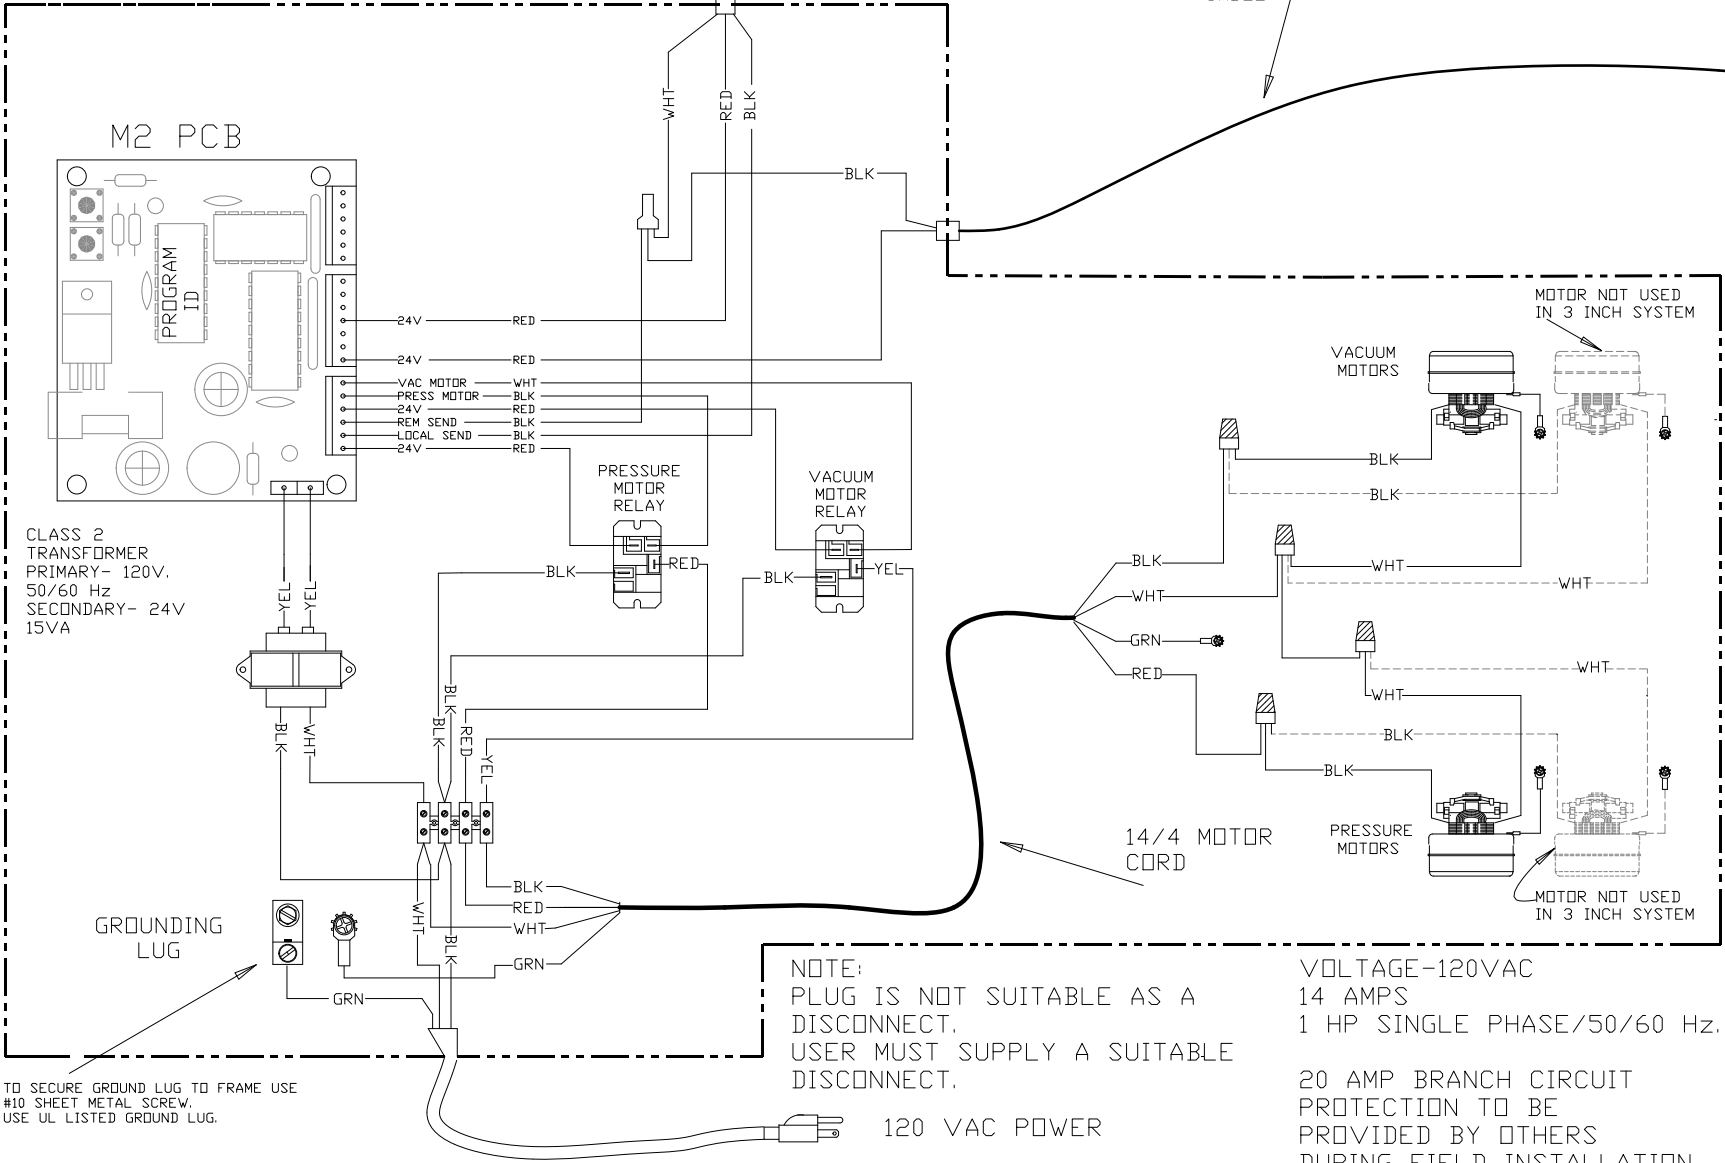

CLASS 2
TRANSFORMER
PRIMARY- 120V.
50/60 Hz
SECONDARY- 24V
15VA

NOTE:
PLUG IS NOT SUITABLE AS A
DISCONNECT.
USER MUST SUPPLY A SUITABLE
DISCONNECT.

VOLTAGE-120VAC
14 AMPS
1 HP SINGLE PHASE/50/60 Hz.

20 AMP BRANCH CIRCUIT
PROTECTION TO BE
PROVIDED BY OTHERS
DURING FIELD INSTALLATION.

TO SECURE GROUND LUG TO FRAME USE
#10 SHEET METAL SCREW.
USE UL LISTED GROUND LUG.

120 VAC POWER



INFORMATION
CONTAINED HEREIN
IS PROPRIETARY TO
EAGLE PNEUMATIC,
INC ALL RIGHTS
RESERVED.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED
FRACTIONS +/-1/32"
DECIMALS +/-0.005"

REVISIONS:
1.-11/27/02
2.-12/17/02
3.-04/10/03
4.-04/25/07
5.-11/07/13

DRAWN BY: JAC

DATE:11/26/02

NAME:
WIRING DIAGRAM
MINI MARK II
TICKET DELIVERY
SYSTEM
3 OR 4 INCH
(M2 PCB)

PART NO.
E-12241

CADFILE: A20