


Expansion box may be connected to:
the ARRIVAL INDICATOR (ULM PCB
connector J6)


or:
The ALARM OUTPUT (ULM PCB
connector J7)

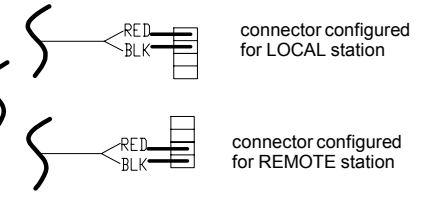

22-2 CABLE FROM
CONTROL PANEL (ULM PCB)

Normally Open Contacts
Contacts rated:
30 AMP
277 VAC
28 VDC

14 Ga wire

TOLERANCES $\pm 1/32"$ FRACTIONAL DIMENSIONS TOLERANCES $\pm .005"$ DECIMAL DIMENSIONS UNLESS OTHERWISE SPECIFIED	MATERIAL:	 EAGLE PNEUMATIC, INC. (863)644-4870
	FINISH:	
INFORMATION CONTAINED HEREIN IS PROPRIETARY TO EAGLE PNEUMATIC, INC. ALL RIGHTS RESERVED	REV.	DRAWING NO. E-12691
TITLE: POINT TO POINT EXPANSION BOX WITH DRY CONTACT CLOSURE 277VAC 30A 28VDC 30A	DRAWN: DTS CADFILE\	DATE: 06/16/16 APPROVED:
		ISSUE 1